

## Long reach renovation grinder ELS 125 D


### For wall and ceiling

#### APPLICATION:

- Grinding of screed seams
- Removing of burrs, bumps, paint and thin adhesives
- Smoothing of concrete and plaster surfaces

#### FEATURES:

- Electronic – soft start, constant speed, temperature control and over current cut-off
- Exchangeable flexible drive shaft – short design, easy to service
- Robust joint – optimal adaptation to inclination and angle
- Foldable front edge of dust guard – for grinding directly to the edge of the work area
- Extraction nozzle Ø 35 mm (rotatable) - direct connection of an M-cleaner of the EIBENSTOCK DSS series
- Locking for suction hose – avoids unintentional loosening of the hose during grinding
- Additional handle – ergonomic handling, variably adjustable at the machine

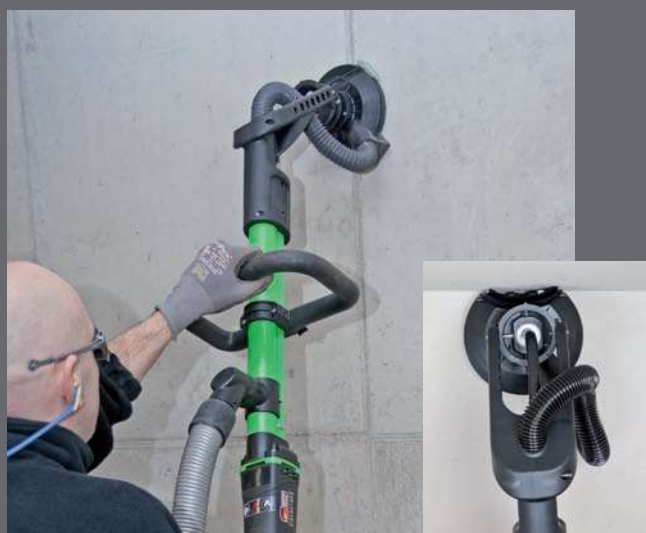

SPECIFICATIONS	EFW
Working height	max. 2600 mm
Working height with 1x Extension	max. 2900 mm
Order no.	3765A000
Supplied	in a box
<b>Accessories</b>	Extension
Working height	300 mm
Order no.	3765B000



**drive shaft**  
can be changed easily, quickly and inexpensively by the user without opening the machine

Ø 125

**DUST PROTECTION SYSTEM**  
Mineral dust may cause cancer!

SPECIFICATIONS	ELS 125 D
Power input	1200 W
Rated voltage	230 V ~
Rated-/No-load speed	8000 rpm
Disc diameter	125 mm
Spindle connection	Ø 22.2 mm
Weight	5.3 kg
Order no.	06231000
Supplied	in a box incl. transport bag, diamond-grinding wheel universal and assembly tools

### Cart EFW for Long reach renovation grinder ELS 125 D

- Mobile cart for Machine and vacuum cleaner
- Force saving in ceiling work
- Toolless design - easy transport, rubberized steering wheels-easy moving, one wheel braked

